

## EE240 Series

State of the art sensor technology, highest reliability of data transmission and the ease of system installation are the outstanding features of the wireless sensor series EE240.

### Wireless Transmitter EE245

The elegant housing combines the measurement of temperature, humidity and CO<sub>2</sub>. An optional display is available to provide local indication. As a standard, batteries provide for the power supply. For more power demanding applications the device can be powered through an external adapter.




### Wireless Transmitter EE244

The industrial housing can be equipped with up to three sensing probes to contact the interchangeable probes. An optional display is available to provide local indication. As a standard, batteries provide for the power supply. For more power demanding applications the device can be powered through an external adapter.



### Interchangeable Sensing probes

A modular structure and easy extendable assortment of sensing probes allow the usage in many applications. For many years, the proven sensor technology of E+E for the measurement values of humidity, temperature, and CO<sub>2</sub> guarantee precise measurements and the highest longtime stability.

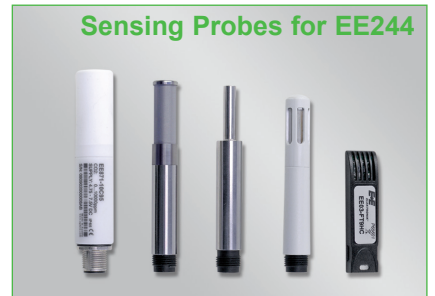

The standard interface and the stored calibration data of the sensing probe allow for any choice or combination of the available sensing probes offered. An adaptation or expansion of the number of sensing probes afterwards or an exchange for service purposes can be achieved in seconds – a must-have for uninterrupted data acquisition. For high temperature applications or installations in small spaces, the sensing probe can be connected with a sensor cable of up to 10 m (33 ft) in length.

### Base Station EE242

The EE242 base station is the central component of a wireless network with up to 500 transmitters or up to 2000 measured parameters. With the base station and the integrated web server one can easily perform the setup of the entire wireless network.



EE242 allows for easy remote access and diagnosis of the network. The measured data is available at the EE242 base station via Ethernet / Modbus TCP and RS485 / Modbus RTU. Four measured parameters can be selected to the analogue outputs (0 - 5 / 10 V or 4 - 20 mA). Measured data and status information are available also on the optional display.

### Router Series EE244-R

The radio range is greatly depending on local circumstances. With the router series EE244-R obstacles can be bypassed or the transmission distance expanded.



## Typical Applications

Pharma and Food Industry  
 Warehouses and Cooling Chambers  
 Control Rooms  
 HVAC Systems and Museums

## Features

Interchangeable Sensing Probes  
 Remote Probes up to 10 m (33 ft)  
 Battery Operating Life up to 1 Years  
 Ethernet and Webserver

## Highest Transmission Reliability

The data transmission is based on the IEEE 802.15.4 protocol with a transmission frequency of 2.4 GHz, which can be used all over the world without any additional cost. A special identification address, checksums, handshakes, and bidirectional communication provide the highest transmission reliability. Typical radio ranges are 60 m (197 ft) for indoor applications and 1000 m (3300 ft) in the open field. Greater radio ranges are easy obtainable with routers. The self-configuring, scalable, and self-healing mesh network, even when a connection fails, is another component contributing to the improvement of the transmission reliability and security. The highest possible data security level is accomplished with a preset encryption key according to AES-128.

## Parallel Operation

Parallel operation of several EE240 wireless networks (i.e. several base stations) is also possible. For this each transmitter and router may be within the transmission range of the routers and basis station of one network only.


## Digital Bus Connection

For bus integration, Modbus is supported. Communication is implemented via Ethernet or RS485 interface.

## Installation / Remote Access / Maintenance via Webserver

The integrated Webserver allows platform-independent installation, remote access and easy maintenance with any commercially available browser (Chrome, Internet Explorer, Firefox,...) on a computer without additional software.

## Wireless Networks

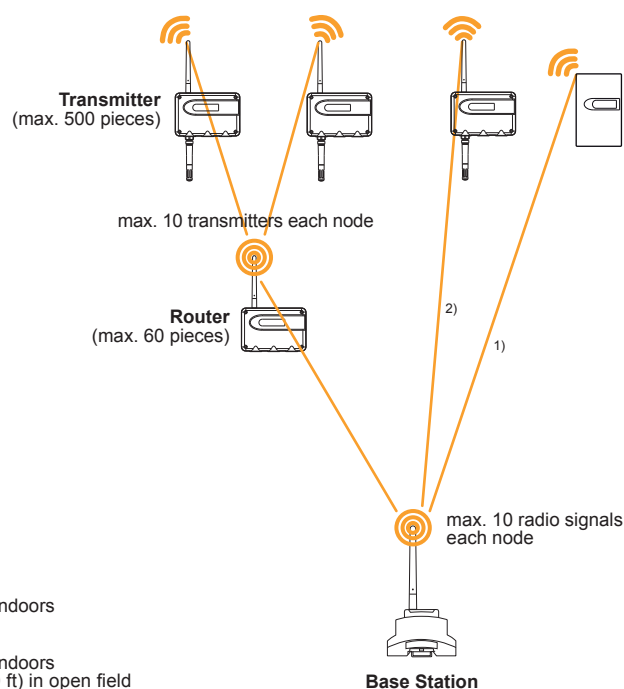

## Technical Data Transmitter EE244 & EE245

### General

Transmission frequency	2.4 GHz	
Transmission system	IEEE 802.15.4	
Transmission power	6.3mW	
Radio range	up to 60m (197 ft) indoors, up to 1000m (3300 ft) in open field	
Approval	ETSI / FCC Part 15.247 / IC	
Electromagnetic compatibility	EN61326-1 Industry	FCC Part 15 Class A
	EN61326-2-3 Industry	ICES-003 Class A



### EE244 (Transmitter, Router)

Supply transmitter (EE244-A)	battery 4x1.5V AA (not in the scope of supply)	
Battery lifetime	> 1 year with a measuring data transmission every 5 min. (for T / %RH)	
External supply transmitter (EE244-B)	8...28V DC SELV, typ. $I_L = 20\text{mA}$ at 24V; max. $I_L = 35\text{mA}$ at 24V DC	
External supply router (EE244-R)	8...28V DC SELV, typ. $I_L = 20\text{mA}$ at 24V; max. $I_L = 35\text{mA}$ at 24V DC	
Housing material	polycarbonate (PC)	
Protection class housing	IP65	
Temperature ranges	working temperature range of probe:	refer to respective data sheet of sensing probe
	working temperature range:	-40...+50°C (-40...122°F) (with display: -20...+50°C / -4...122°F)
	storage temperature range:	-40...+50°C (-40...122°F) (with display: -20...+50°C / -4...122°F)
Max. number of sensing probes	3 (2*)	
Max. number of measuring signals	6 (4*) (T / RH / CO <sub>2</sub> **)	

### EE245 (Transmitter)


Power Supply	battery 4x1.5V AA (not in the scope of supply)	
Battery lifetime	> 1 year with a measuring data transmission every 5 min. (for T / %RH)	
Radio Range	up to 60m (197 ft) indoors	
Antenna	internal	
External supply transmitter (EE245)	DC 8-28V SELV / AC 12V (±20%)	
Housing material	polycarbonate (PC)	
Protection class housing	IP30	
Temperature ranges	working temperature range:	0...90%RH (non-condensing) / -5...+55°C (23...131°F)
	storage temperature range:	0...90%RH (non-condensing) / -5...+55°C (23...131°F)
Max. numbers of measuring values	3 (T / RH / CO <sub>2</sub> **)	
Accuracy	T:	± 0,3 °C (at 20 °C) / ± 0,4 °C (20...55 °C)
	Rh:	± 3 % (30...70 %) / ± 5 % (70...90 %)
	CO <sub>2</sub> :	2000ppm (± 50ppm +2 % of m.v.)
		5000ppm (± 50ppm +3 % of m.v.)
Connection	screw terminal 1,5mm <sup>2</sup>	

\*) with external power supply

\*\*) for CO<sub>2</sub> an external power supply is recommended.


## Dimensions (mm/inch)

EE244-Ax3:

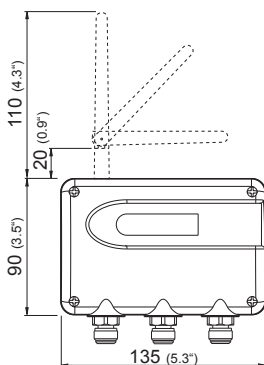

depth: 50 (2")


EE244-Bx2:

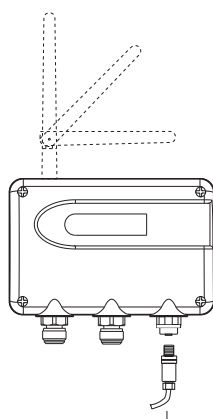

socket / ELKA 4012 PG7<sup>1)</sup>

1) included in the scope of supply


EE245

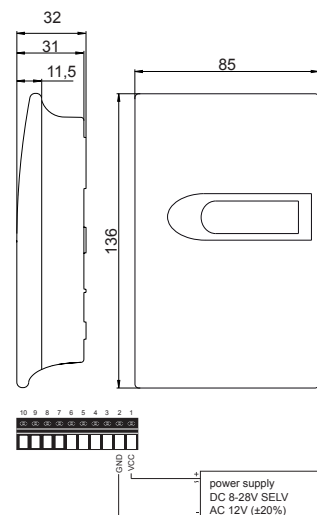





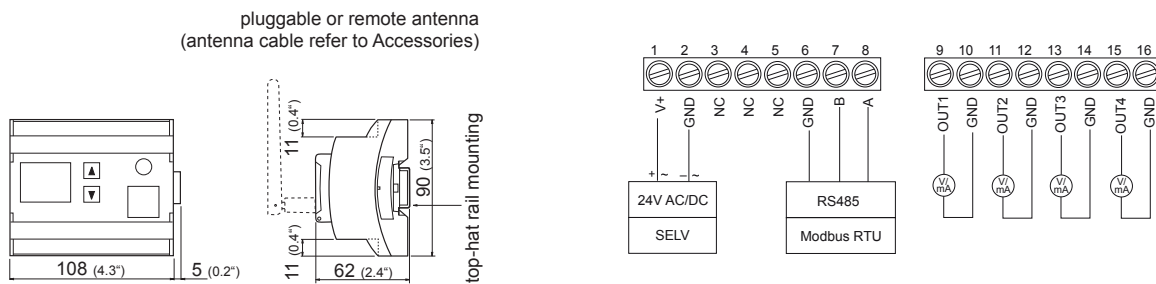

## Technical Data Base Station EE242

Supply voltage SELV	24V AC/DC $\pm 20\%$
Digital interface	• Ethernet (Modbus TCP or JSON) • RS485 (Modbus RTU / ASCII)
Current consumption	typ. $I_L = 150\text{mA}$ at 24V DC; max. $I_L = 180\text{mA}$ at 24V DC
Analogue outputs	0-5V $-0.5\text{mA} < I_L < 0.5\text{mA}$ 0-10V $-1\text{mA} < I_L < 1\text{mA}$ 0-20mA / 4-20mA $R_L < 500\ \Omega$
Number of analogue outputs	4
Accuracy of analogue outputs	$\pm 5\text{mV}$ resp. $\pm 10\mu\text{A}$
Temperature dependence of analogue outputs	max. $0.1 \frac{\text{mV}}{^\circ\text{C}}$ resp. $1 \frac{\mu\text{A}}{^\circ\text{C}}$
Resolution of analogue outputs	0.7mV resp. $1.50\mu\text{A}$
Electrical connection	screw terminals max. $2.5\text{mm}^2$
Housing material	polycarbonate (PC)
Protection class housing	IP20
Temperature ranges	working temperature range: $-30\text{...}+50^\circ\text{C}$ ( $-22\text{...}122^\circ\text{F}$ ) (with display: $-20\text{...}+50^\circ\text{C}$ / $-4\text{...}122^\circ\text{F}$ ) storage temperature range: $-30\text{...}+50^\circ\text{C}$ ( $-22\text{...}122^\circ\text{F}$ ) (with display: $-20\text{...}+50^\circ\text{C}$ / $-4\text{...}122^\circ\text{F}$ )

## Dimensions (mm/inch) - Connection Diagram EE242



## Overview of EE244 Sensing Probes

Application	Picture	Measuring Range	Accuracy	Order Code
<b>Humidity/Temperature Probes</b>				
RH/T probe for standard applications		0...100% RH $-40\text{...}80^\circ\text{C}$ ( $-40\text{...}176^\circ\text{F}$ )	$\pm 2\%$ RH (0...90% RH) $\pm 3\%$ RH (90...100% RH) $\pm 0.1^\circ\text{C}$ ( $\pm 0.18^\circ\text{F}$ ) at $20^\circ\text{C}$ ( $68^\circ\text{F}$ )	EE07-PFT1
RH/T probe for clean room applications, food and pharmaceutical industry		0...100% RH $-40\text{...}80^\circ\text{C}$ ( $-40\text{...}176^\circ\text{F}$ )	$\pm 2\%$ RH (0...90% RH) $\pm 3\%$ RH (90...100% RH) $\pm 0.1^\circ\text{C}$ ( $\pm 0.18^\circ\text{F}$ ) at $20^\circ\text{C}$ ( $68^\circ\text{F}$ )	EE07-MFT9
RH/T module for installation in small spaces or unobtrusive mounting		0...95% RH $-40\text{...}85^\circ\text{C}$ ( $-40\text{...}185^\circ\text{F}$ )	$\pm 3\%$ RH (10...100% RH) at $21^\circ\text{C}$ ( $69.8^\circ\text{F}$ ) $\pm 0.3^\circ\text{C}$ ( $\pm 0.54^\circ\text{F}$ ) at $20^\circ\text{C}$ ( $68^\circ\text{F}$ )	EE03-FT9
<b>Temperature Probes</b>				
T probe for standard applications		$-40\text{...}80^\circ\text{C}$ ( $-40\text{...}176^\circ\text{F}$ )	$\pm 0.1^\circ\text{C}$ ( $\pm 0.18^\circ\text{F}$ ) at $20^\circ\text{C}$ ( $68^\circ\text{F}$ )	EE07-PT1
T probe for clean room applications, food and pharmaceutical industry		$-40\text{...}80^\circ\text{C}$ ( $-40\text{...}176^\circ\text{F}$ )	$\pm 0.1^\circ\text{C}$ ( $\pm 0.18^\circ\text{F}$ ) at $20^\circ\text{C}$ ( $68^\circ\text{F}$ )	EE07-MT
<b>CO<sub>2</sub> Probes</b>				
CO <sub>2</sub> probe for standard applications		0...2000ppm 0...5000ppm 0...10000ppm	$\pm (50\text{ppm} + 2\% \text{ of m.v.})$ $\pm (50\text{ppm} + 3\% \text{ of m.v.})$ $\pm (100\text{ppm} + 5\% \text{ of m.v.})$	EE871

## Ordering Guide

### BASE STATION EE242

Hardware Configuration		EE242-	
Frequency	2,4 GHz (transmission power 6,3 mW)	A	
Output signal	0-5 V	2	
	0-10 V	3	
	0-20 mA	5	
	4-20 mA	6	
Display	with	D	
	without	-	
Software Configuration			
Physical parameters of outputs	relative humidity RH [%] (A)	Output 1	A / B / C / R
	temperature T [°C] (B)	Output 2	A / B / C / R
	dew point temperature Td [°C] (C)	Output 3	A / B / C / R
	CO <sub>2</sub> CO <sub>2</sub> [ppm] (R)	Output 4	A / B / C / R
Unit	metric / SI (°C)		-
	non metric / US (°F)		E01
T-Scaling (Output T - °C or °F)	-40...60 (T02)		Select Txx code
	0...50 (T04)		
Td-Scaling (Output Td - °C or °F)	-20...50 (T48)		Select Tdxx code
	further scalings on request		
CO <sub>2</sub> -Scaling (in ppm)	0...2.000 (C20)		Select Cxx code
	0...5.000 (C21)		
	0...10.000 (C22)		

### TRANSMITTER EE245

Hardware Configuration		EE245-	
Type	RH + T + CO <sub>2</sub>	FTC	
	RH + T	FTx	
	T + CO <sub>2</sub>	xTC	
	T	xTx	
CO <sub>2</sub> (only for TC and FTC)	0...2.000 ppm	2	
	0...5.000 ppm	5	
	without CO <sub>2</sub> measurement	x	
Frequency	2,4 GHz (transmission power 6,3 mW)	A	
Display	with	D	
	without	-	
Software Configuration			
Unit	metric / SI (°C)		-
	non metric / US (°F)		E01

### TRANSMITTER / ROUTER EE244

Hardware Configuration		EE244-
Type	transmitter	A
	transmitter with external supply <sup>1)</sup>	B
	Router	R
Frequency	2,4 GHz (transmission power 6,3 mW)	A
Number of sensing probes	1	1
	2	2
	3 (not possible with type B - transmitter with external supply)	3
Display	with	D
	without	-

1) External power supply units not included in the scope of supply

### SENSING PROBES FOR EE244

Humidity / Temperature	probe RH/T (polycarbonate)	EE07-PFT1
	probe RH/T (metal)	EE07-MFT9
	module RH/T	EE03-FT9
Temperature	probe T (polycarbonate)	EE07-PT1
	probe T (metal)	EE07-MT
CO <sub>2</sub>	probe CO <sub>2</sub>	EE871



## Accessories / Replacement Parts

### Base Station:

- Antenna cable 2m (7ft) (HA010330)
- Crossover cable (PC to base station) (HA010333)
- External power supply unit (V03)

### Transmitter:

- |   |            | <b>EE244</b> | <b>EE245</b> |
|---|------------|--------------|--------------|
| - Probe cable for EE07 -<br>2m (7ft) / 5m (16ft) / 10m (33ft) | (HA0108xx) | (✓)          |              |
| - Connection cable for EE03, 2m (7ft)                         | (HA010328) | (✓)          |              |
| - Connection cable for EE03, 5m (16ft)                        | (HA010329) | (✓)          |              |
| - Antenna cable 2m (7ft)                                      | (HA010330) | (✓)          |              |
| - Bracket for rail installation                               | (HA010203) | (✓)          |              |
| - Reference probes  | (HA010403) | (✓)          |              |
| - Duct mounting kit for EE07                                  | (HA010209) | (✓)          |              |
| - External power supply unit                                  | (V03)      | (✓)          | (✓)          |

## Order Examples

### Position 1 - Base Station:

**EE242-A3D/ABCR-T04-Td48-C20**

Frequency: 2,4GHz  
 Output signal: 0-10V  
 Display: yes  
 Outputs: RH, T, Td, CO<sub>2</sub>  
 Unit: SI  
 Scaling: T: 0...50; Td: -20...50

### Position 2 - Transmitter / Router:

**EE244-BA1D**

Type: Industrial transmitter  
 with external supply  
 Frequency: 2,4GHz  
 Probe: 1  
 Display: yes

### Position 3 - Sensing Probes:

**EE07-PFT1, EE07-MT**

### Position 1 - Base Station:

**EE242-A3D/ABCR-T04-Td48-C20**

Frequency: 2,4GHz  
 Output signal: 0-10V  
 Display: yes  
 Outputs: RH, T, Td, CO<sub>2</sub>  
 Unit: SI  
 Scaling: T: 0...50; Td: -20...50

### Position 2 - Transmitter:

**EE245-FTC5Ax**

Type: Room transmitter for relative  
 humidity, temperature and CO<sub>2</sub>  
 CO<sub>2</sub>: 0...5000ppm  
 Frequency: 2,4GHz  
 Display: without